

HDSI IR VANDAL DOME CAMERA

FEATURES

1/3 INCH SONY CMOS
 HD-SDI (1080P, 720P) / High Resolution (1000 TV Line OVER)
 HD-SDI (High Definition Serial Digital Interface) / 0 Lux at IR On (IR LED 40pcs)
 Upgraded Waterproof Housing (IP68 rating) / OSD Controlled
 WDR (Wide Dynamic Range) / True Day & Night (ICR) Function
 DNR (Digital Noise Reduction) / Motion / Privacy / Easy Installation / 3Axis
 DC Auto IRIS V/F Lens 2,8~12mm, 3,5~16mm
 DC Auto IRIS & TDN V/F Lens 2,8~12mm, 3,5~16mm




SPECIFICATION

Resolution	HD-SDI(1080P, 720P) / 1000 TV LINE OVER
Sensor	1/3 INCH SONY CMOS
Total Pixels	2010(H) X 1108(V) = 2,227,080
Effective Pixels	1944(H) X 1092(V) = 2,122,648
Scanning System	PROGRESSIVE
S/N (Y signal)	More than 52 dB (AGC Off)
Video Output	SMPTE292M (HD-SDI) / CVBS: 1.0Vp-p (75ohm)
Min.Illumination	0 Lux at IR On
White Balance	AUTO / AUTO EXT / PUSHING / MANUAL
Electronic shutter speed	Auto / Manual (1/30sec ~ 1/30,000sec)
Brightness	ADJUSTABLE (0 ~ 20 STEP)
SENS_UP	OFF / X2 / X3 / X4
DNR	OFF / LOW / MIDDLE / HI
WDR/BLC	OFF / WDR / BLC
HLM	OFF / SET
ACE	OFF / ON
Day & Night	Auto (Day (←) Night TIME Change), COLOR, B/W
Privacy	OFF / ON (28 Zone)
Motion Detection	OFF / ON
D.ZOOM	0 ~ X112
FLIP	OFF / ON
FREEZE	OFF / ON
Language	ENGLISH
Sharpness	ADJUSTABLE (0 ~ 10 STEP)
Mirror	ON / Off
COMM.	RS-485(PELCO-D)
Operating Temperature/Humidity	-10°C~+50°C / 30%~80% RH
Storage Temperature/Humidity	-20°C~+60°C / 20%~90% RH
Power	DC12V ±10% Only / DC12V · AC24V ±10% DualPower (option)
HS-SDI	100 ~ 150m
Transmission range	Max transmission range is depends on the cable manufacturer and the installation environment.

► Above specifications may be changed without any notice.



HDSI IR VANDAL DOME CAMERA

DIMENSION

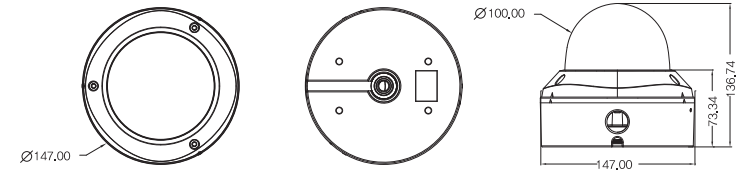


INSTALLATION


1. Opening
Use the allen wrench to open the cover.
2. Place the camera in the desired location and install using the screws supplied.

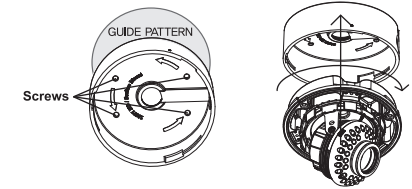

3. Connecting Cables

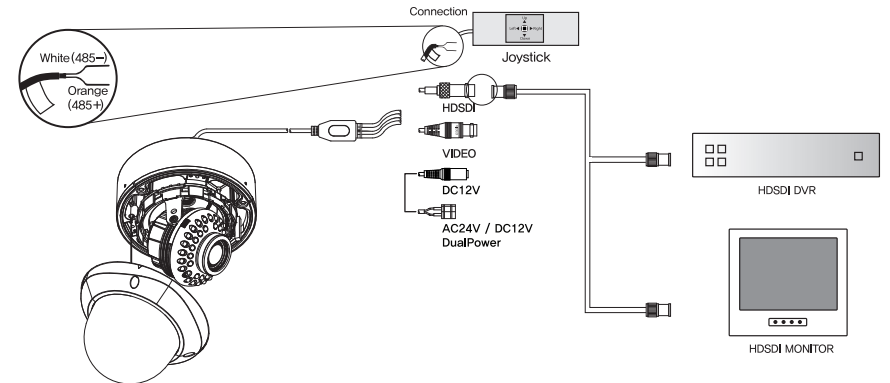

4. Pan/Tilt & Focus Controls

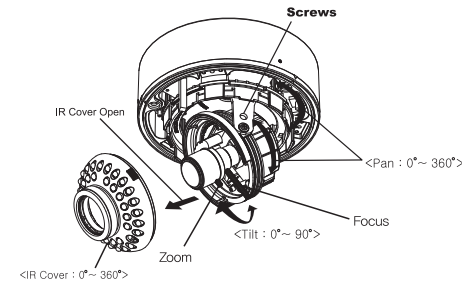

5. Use the allen wrench to close the cover.

